


How to add a printer to MAC computer after installing the driver?
Please follow the instructions below:



1.Open “System Preferences”, select and click “Printers&Scanners”.





2.Click “+” on the page of “Printers&Scanners”.

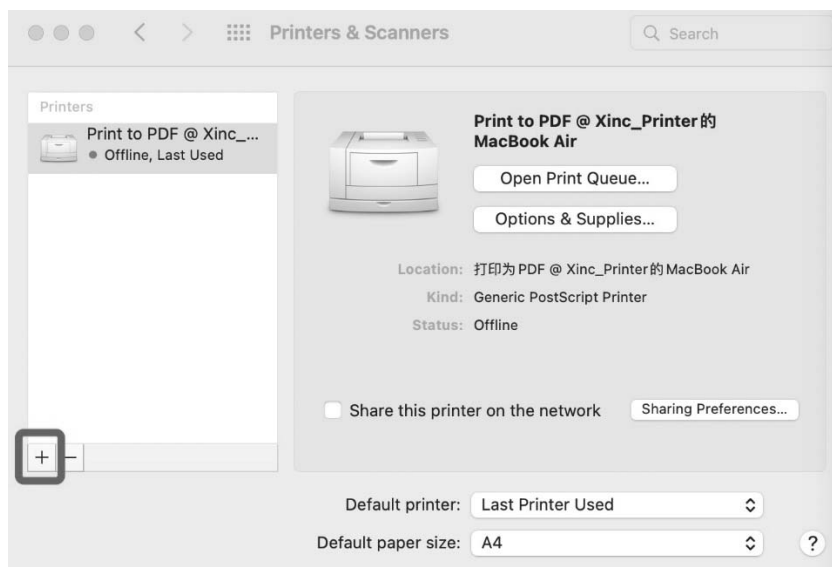

3. Select "XCLABEL N401 (Select the printer model)" first, and then click "Choose a driver..."

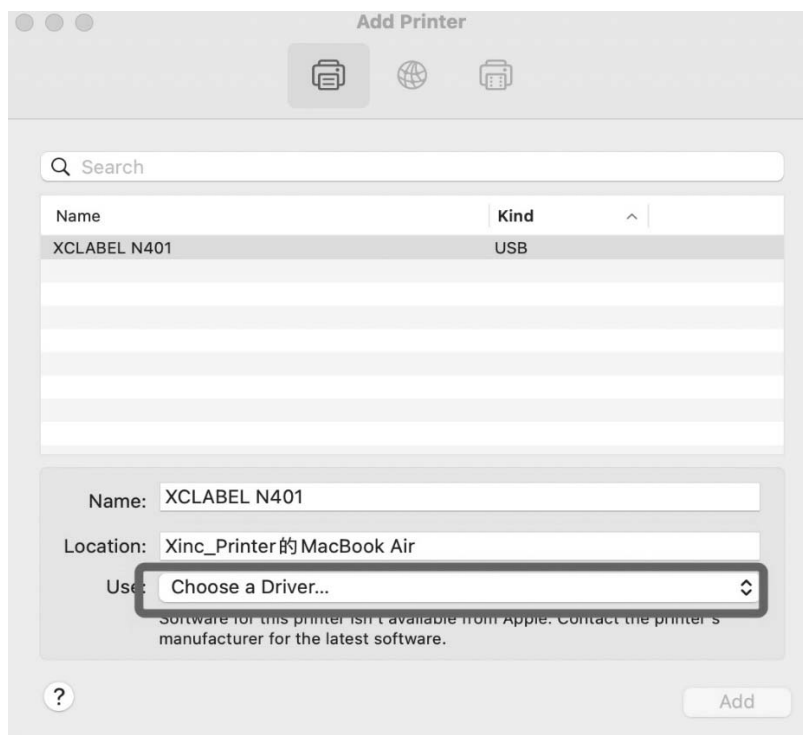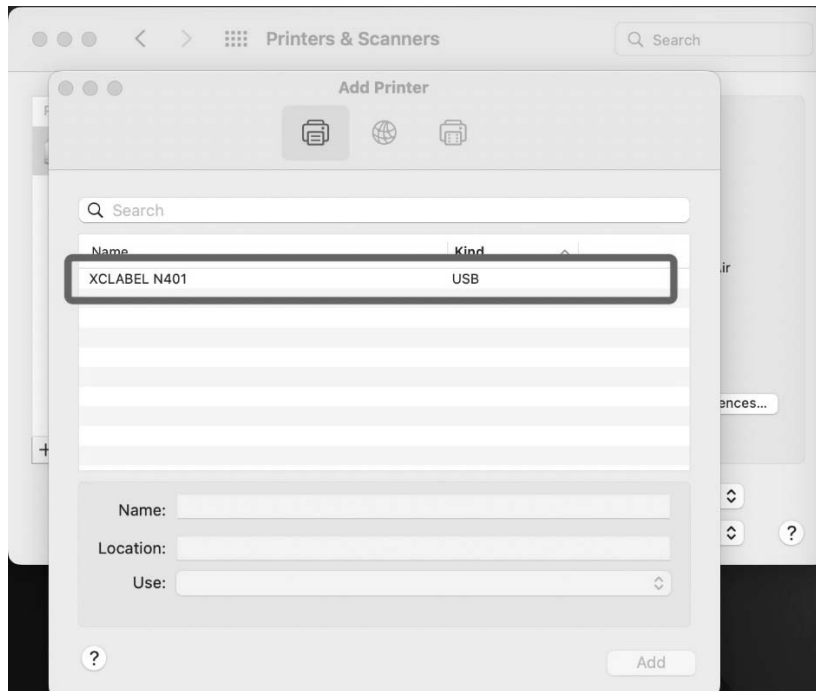

4. Select “XCLABEL N401(Select the printer model)”, then click “Select Software” and select “Label Printer M4201”, click “OK”.

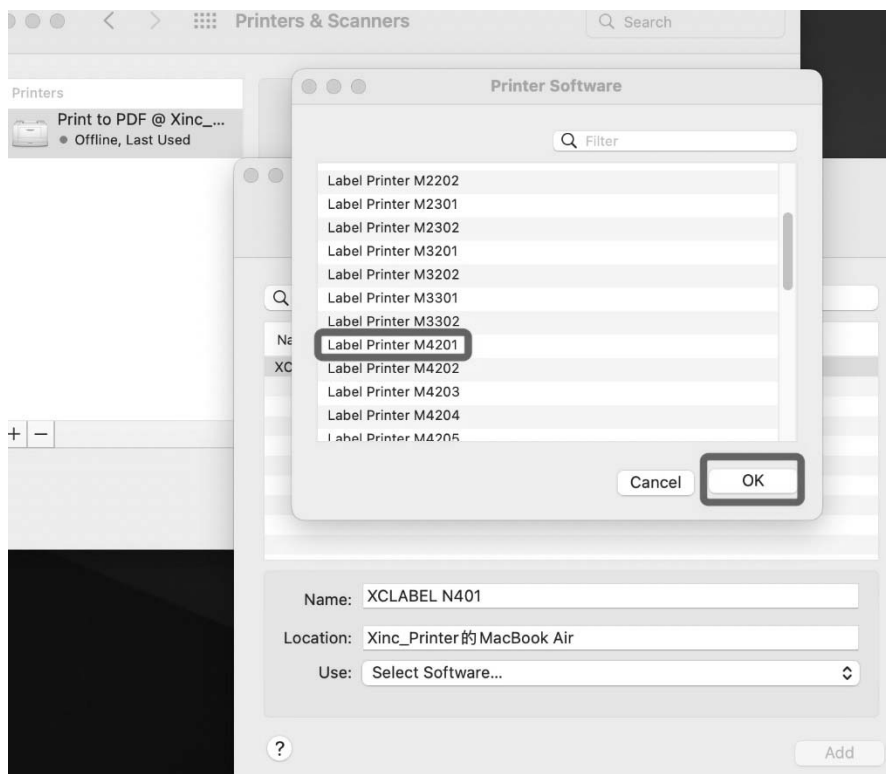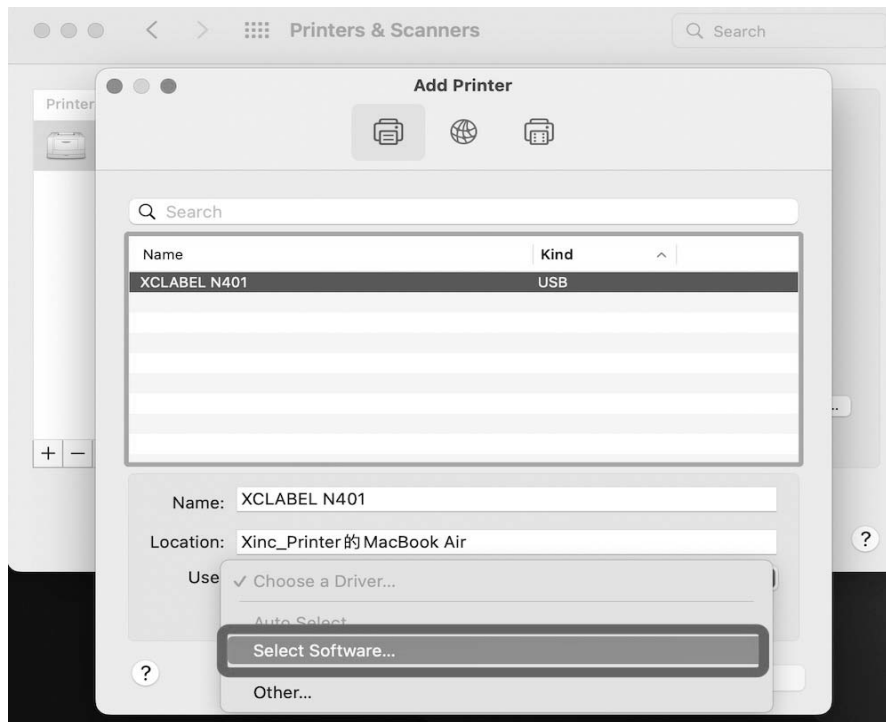

5. Click “Add”. Finished adding printer till now.

Add Printer

Q Search

Name

Kind

^

XCLABEL N401

USB

Name: XCLABEL N401


Location: Xinc_Printer的 MacBook Air

Use: Label Printer M4201

?


Add

1. Open an application where you want to print a label test. Here is an example of Word.
Click “File” and select “Print..”

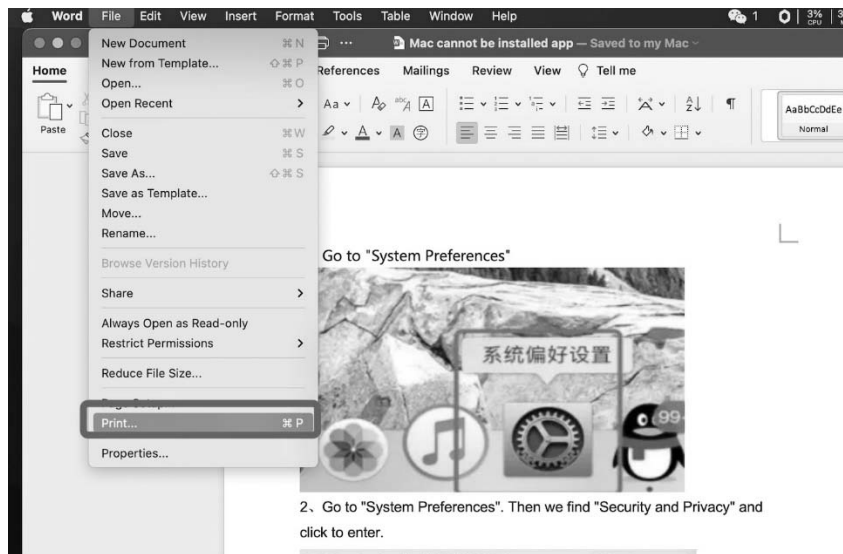

2. Go to "System Preferences". Then we find "Security and Privacy" and click to enter.

2.Set “Paper Size” in the red box as below.

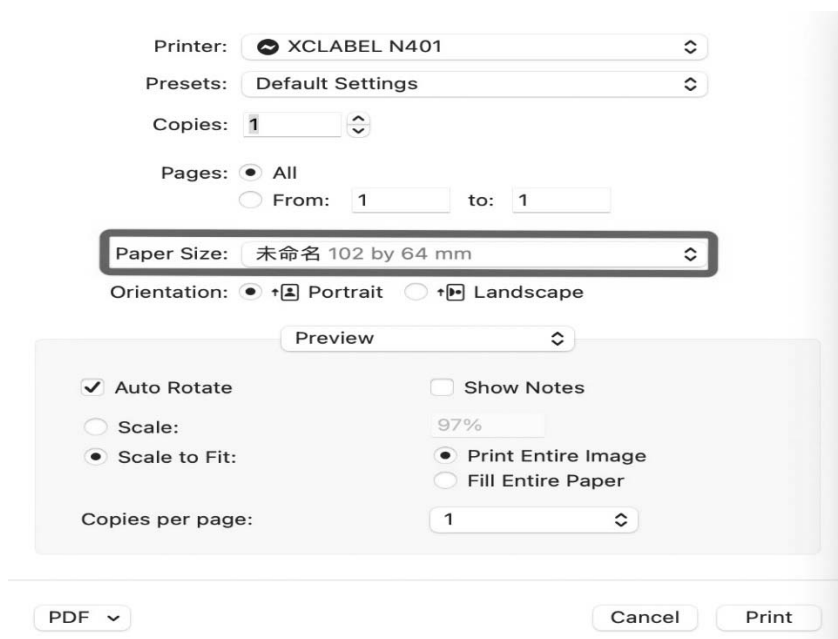

3.Then click “Printer Features” to set as below in the red box: Set the printer darkness and speed respect

Printer: XCLABEL N401

Presets: Default Settings

Copies: 1

Pages: ☒ All
☐ From: 1 to: 1

Paper Size: 未命名 102 by 64 mm

Orientation: ☒ Portrait ☐ Landscape

Printer Features

Feature Sets: Printer Options

Print Speed: 5.00 in/sec

Darkness: 8

Horizontal: 0 mm

Vertical: 0 mm

PDF Cancel Print

4.And click “Feature Sets:” as bellow in the red box: Set the label type and interval size of the printer, and the action after printing and click “print” to print.

Printer: XCLABEL N401

Presets: Default Settings

Copies: 1

Pages: ☒ All
☐ From: 1 to: 1

Paper Size: 未命名 102 by 64 mm

Orientation: ☒ Portrait ☐ Landscape

Printer Features

Feature Sets: Media Setting

Type: Label with Gaps

GapsHeight: 0.118 in

Post-Print Action: Tear Off

Occurrence: After Every Page

Interval: 1

Feedout: 0 mm

PDF Cancel Print

Printer: XCLABEL N401

Presets: Default Settings

Copies: 1

Pages: ☒ All
☐ From: 1 to: 1

Paper Size: 未命名 102 by 64 mm

Orientation: ☒ Portrait ☐ Landscape

Printer Features

Feature Sets: Media Setting

Type: Label with Gaps

GapsHeight: 0.118 in

Post-Print Action: Tear Off

Occurrence: After Every Page

Interval: 1

Feedout: 0 mm

PDF Cancel Print